


ADDENDUM #1

2014 General Street Repairs  
Edwardsville, KS

May 12, 2014

**Full Depth Patch**

Contractor is to use APWA type-3-01 for the surface course on a full depth patch.

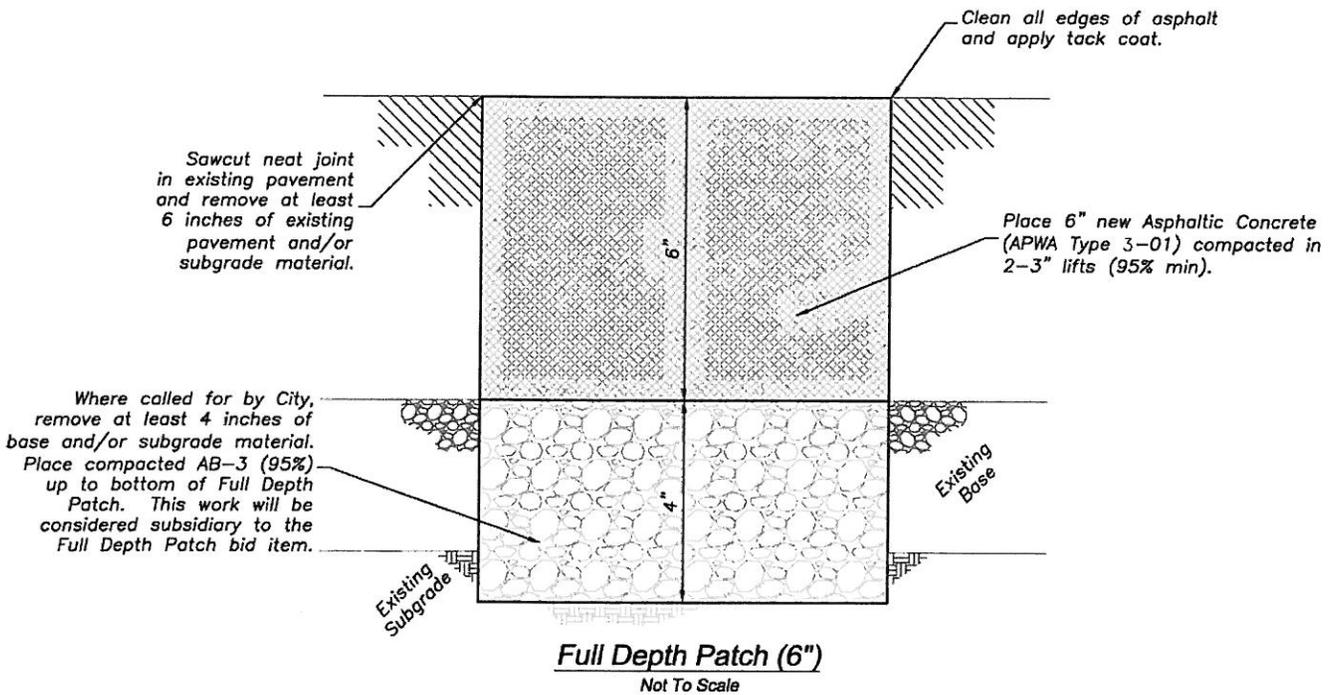

Acknowledgment

Date

**Clarification**

**102nd Terr. Edgehill Dr. Intersection Improvements  
Estimated Quantities - FOR INFORMATION ONLY  
Work to be Bid as Lump Sum Item**

			<b>Estimated</b>
	<b>Item Description</b>	<b>Unit</b>	<b>Quantity</b>
	Mobilization	Lump Sum	1
	Unclassified Excavation (Incl. Pavement Removal)	Cu. Yd.	963
	Compaction of Earthwork (Type AA) (MR-5-5)	Cu. Yd.	335
	Compaction of Earthwork (Type B) (MR-90)	Cu. Yd.	17
	Contractor Wasted Earthwork	Cu. Yd.	611
	Water (Grading)(Set Price)	M. Gal	1
	HMA Comm. Gr.- Surface Course (Class A)(2")	Tons	124
	HMA Comm. Gr. - Base Course (Class A)(4")	Tons	250
	Concrete Curb & Gutter (2')	LF	722
	Driveway Replacement (PCC)	SY	50
	Mailbox Installation	Ea.	1
	Sod	SY	400.0
	Signing	Lump Sum	1
	Traffic Control	Lump Sum	1
	Erosion Control	Lump Sum	1

Acknowledgment

Date